


**NOTES:**

1. CONCRETE ENCASEMENT SHALL BE USED WHEN COVER IS LESS THAN 4 FEET, AND WHERE CONDITIONS DIRECTED BY THE FULTON COUNTY ENGINEER
2. ENCASEMENT TO BE PLACED AGAINST UNDISTURBED NATURAL GROUND OR FILL COMPACTED TO 90% RELATIVE COMPACTION, UNLESS OTHERWISE SPECIFIED.
3. PROVIDE 3 SUPPORTS FOR EACH SECTION OF DIP, OR @ 5'-0" INTERVALS FOR HDPE AND PVC PIPES.

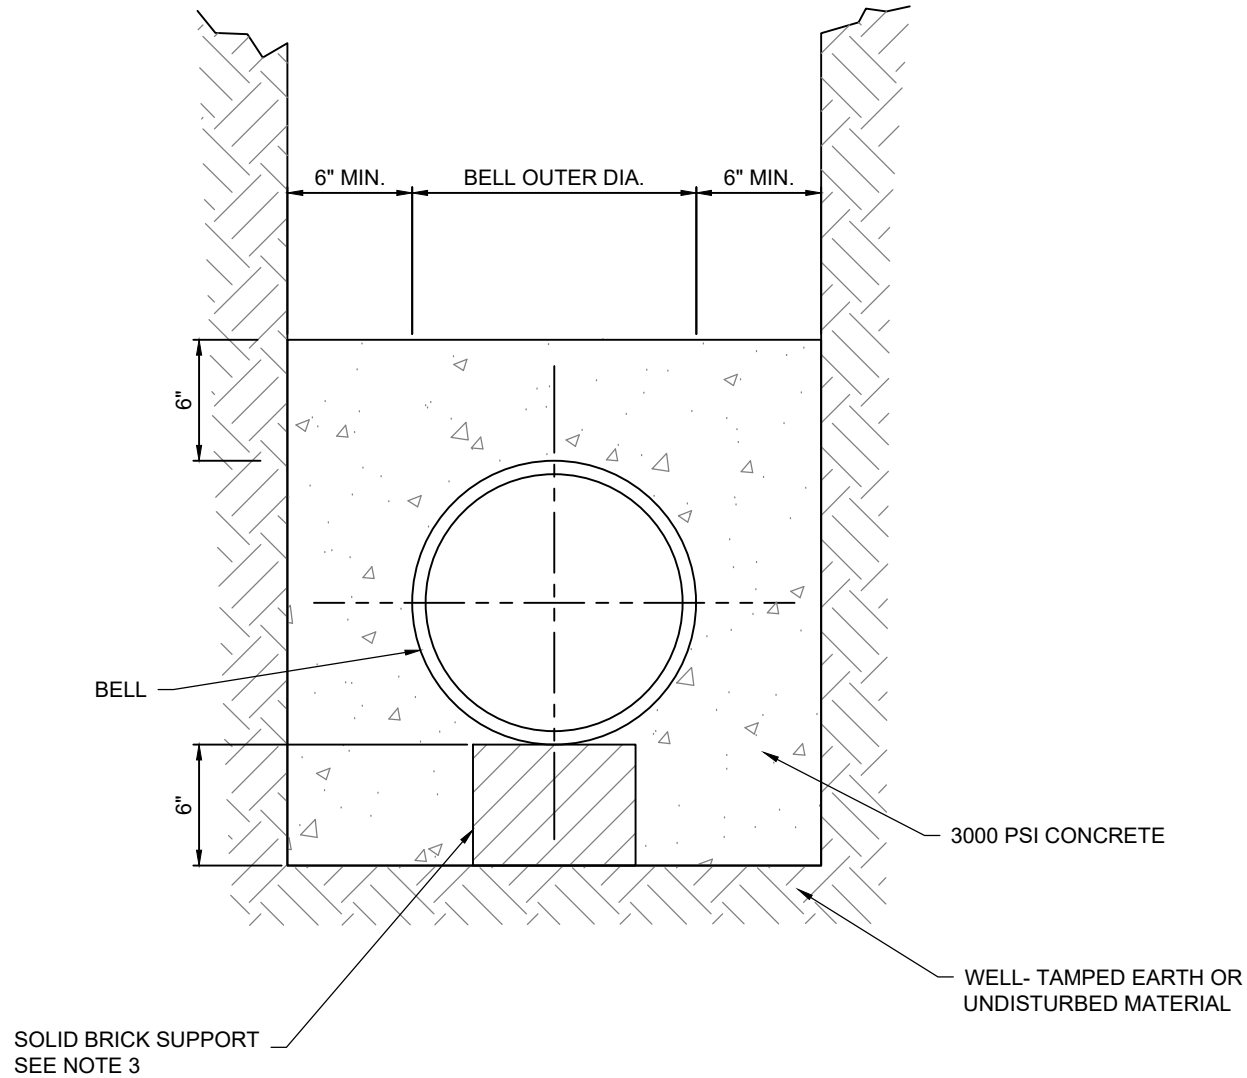

**CONCRETE ENCASEMENT**

NTS

95% SUBMITTAL

<p>FULTON COUNTY STANDARD DETAIL 110 CONCRETE ENCASEMENT</p>		DATE	REVISIONS	DATE	REVISIONS			<p>FULTON COUNTY PUBLIC WORKS 141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-224-0498</p>	110
						DGS/DRN/CHKD: <u>   XXX   </u>			
						APPROVED: <u>   XXX   </u>			
						DATE: <u>   XX-X-XX   </u>			

DRAWING NO.