FULTON COUNTY STANDARD DETAIL 315 SPEED TABLE

MITTA

SUB

DATE		REVISIONS	DATE	REVISIONS	
M/Y	XXX		M/Y	XXX	DOC/DE
					DGS/DR
					APPRO
					/
					DATE:_
					_

RN/CHKD: XXX XX-X-XX

12" (FLAT)

SECTION A-A


SECTION C-C

NOTES:

FULTON COUNTY PUBLIC WORKS 141 PRYOR ST. ATLANTA, GA. 30303 404-612-7400 FAX: 404-224-0498

DRAWING NO.

315

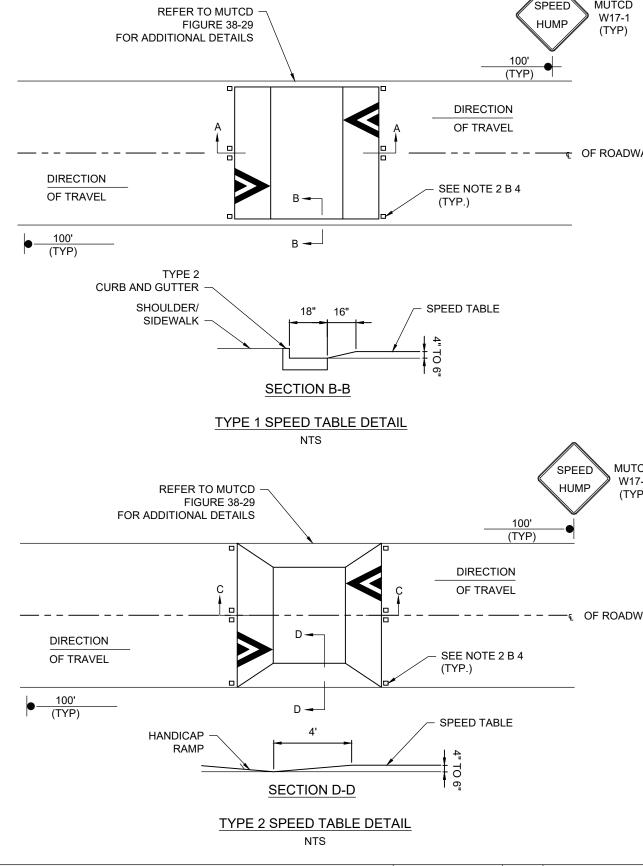

EDITION. 2) APPLY TACK COAT AT A RATE OF 0.04 TO 0.06 GALLONS PER SQUARE YARD IN ACCORDANCE WITH SECTION 413 OF THE GDOT STANDARD SPECIFICATIONS, CURRENT EDITION, OR AS DIRECTED BY ENGINEER.

1. USE TYPE 2 SPEED TABLES IN CONJUNCTION WITH CROSSWALKS,

1) CONSTRUCT SPEED TABLES USING 3000 PSI HIGH/EARLY

CONCRETE REINFORCED WITH #3 BARS AT 12" C. TO C. BOTH WAYS, OR 6 X 6 -W2.9 X W2.9 WELDED WIRE FABRIC

2) CONCRETE WILL BE COLORED AND TOP STAMPED WITH TEXTURE PER FULTON COUNTY TRAFFIC ENGINEER.

1) CONSTRUCT SPEED TABLES USING ASPHALTIC CONCRETE 12.5 MM SUPERPAVE IN ACCORDANCE WITH SECTION 402 OF

THE GEORGIA DOT STANDARD SPECIFICATIONS, CURRENT

2. SPEED TABLES MAY BE CONSTRUCTED USING ASPHALT OR CONCRETE, PER FULTON COUNTY TRAFFIC ENGINEER.

OR 4 X 4 - W2.0 X W2.0 WELDED WIRE FABRIC.

A. CONCRETE CONSTRUCTION:

B. ASPHALT CONSTRUCTION:

3) APPLY PAVEMENT MARKINGS USING WHITE THERMOPLASTIC 0.090 INCHES IN THICKNESS IN ACCORDANCE WITH SECTION 653 OF THE GDOT STANDARD SPECIFICATIONS, CURRENT EDITION.

4) APPLY RAISED PAVEMENT MARKERS PER GDOT CONSTRUCTION DETAIL T-15C, TYPE 11 (YELLOW/YELLOW) (CENTERLINE) AND TYPE 13 (CLEAR/RED) (EDGE OF PAVEMENT), ÚSING HEATED BITUMINOUS ADHESIVE IN ACCORDANCE WITH SECTION 868 OF THE GDOT SPECIAL SHELF PROVISION SPECIFICATIONS, CURRENT EDITION.

6'

3. SEE SIGN INSTALLATION DETAIL DWG 322 A/B/C